




SUYAN VALVE

Lift Check Valves

升降式止回阀

H41H(Y) -16-25C/P/R/I

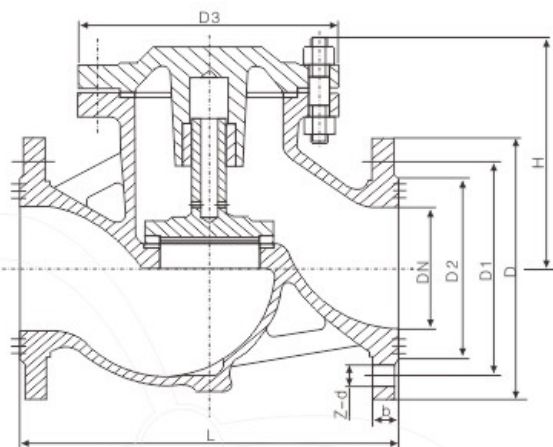

主要外形和连接尺寸 Main External and Connection Dimension

单位 Unit:mm

公称通径 DN	主要外形尺寸和连接尺寸 (mm) Main External and Connection Dimension							WT (Kg)
	L	D	D1	D2	b	Z-d	H	
H41H-16C H41W-16C H41W-16P H41W-16R H41W-16I								
15	130	95	65	45	14	4-14	77	3
20	150	105	75	55	14	4-14	77	4
25	160	115	85	65	14	4-14	80	5
32	180	135	100	78	16	4-18	85	7
40	200	145	110	85	16	4-18	95	9
50	230	160	125	100	16	4-18	105	10
65	290	180	145	120	18	4-18	120	20
80	310	195	160	135	20	8-18	130	30
100	350	215	180	155	20	8-18	140	39
125	400	245	210	185	22	8-18	155	50
150	480	280	240	210	24	8-23	180	70
200	600	335	295	265	26	12-23	215	161
250	730	405	355	320	30	12-25	260	251
300	850	460	410	375	34	12-25	315	395
H41H-25 H41W-25 H41W-25P H41W-25R H41W-25I								
15	130	95	65	45	16	4-14	100	3.4
20	150	105	75	55	16	4-14	105	5
25	160	115	85	65	16	4-14	120	5.7
32	180	135	100	78	18	4-18	130	9.1
40	200	145	110	85	18	4-18	135	11.8
50	230	160	125	100	20	4-18	149	14.4
65	290	180	145	120	22	8-18	160	23
80	310	195	160	135	22	8-18	169	30
100	350	230	190	160	24	8-23	194	44
125	400	270	220	180	28	8-25	222	65
150	480	300	250	218	30	8-25	255	99
200	600	360	310	278	34	12-25	305	190
250	730	425	370	332	36	12-30	355	315
300	850	485	430	390	40	16-30	410	450



苏盐阀门

Lift Check Valves

升降式止回阀

H41H(Y) -40-64P/R/I

主要外形和连接尺寸Main External and Connection Dimension

单位Unit:mm

公称 通径 DN	主要外形尺寸和连接尺寸(mm)Main External and Connection Dimension								WT (Kg)
	L	D	D1	D2	D6	B	Z-Φd	H	
H41H-40 H41W-40 H41W-40P H41W-40R H41W-40I									
15	130	95	65	45	40	16	4-Φ14	100	4
20	150	105	75	55	51	16	4-Φ14	105	5.5
25	160	115	85	65	58	16	4-Φ14	120	6
32	180	135	100	78	66	18	4-Φ18	130	12
40	200	145	110	85	76	18	4-Φ18	135	14
50	230	160	125	100	88	20	4-Φ18	149	18
65	290	180	145	120	110	22	8-Φ18	160	27
80	310	195	160	135	121	22	8-Φ18	169	36
100	350	230	190	160	150	24	8-Φ23	194	50
125	400	270	220	188	176	28	8-Φ25	225	75
150	480	300	250	218	204	30	8-Φ25	255	119
200	600	375	320	282	260	38	12-Φ30	305	217
250	730	445	385	345	313	42	12-Φ34	360	365
300	850	510	450	408	364	46	12-Φ34	415	310

主要外形和连接尺寸Main External and Connection Dimension

单位Unit:mm

公称 通径 DN	主要外形尺寸和连接尺寸(mm)Main External and Connection Dimension								WT (Kg)
	L	D	D1	D2	D6	b	Z-Φd	H	
H41H-64 H41W-64 H41W-64P H41W-64R H41W-64I									
15	210	105	75	55	40	18	4-Φ14	100	7
20	230	125	90	68	51	20	4-Φ18	110	11
25	230	135	100	78	58	22	4-Φ18	125	13
32	260	150	110	82	66	24	4-Φ23	140	14
40	260	165	125	95	76	24	4-Φ23	168	20
50	300	175	135	105	88	26	4-Φ23	170	23
65	340	200	160	130	110	28	8-Φ23	188	37
80	380	210	170	140	121	30	8-Φ23	205	46
100	430	250	200	168	150	32	8-Φ25	230	68
125	500	295	240	202	176	36	8-Φ30	230	89
150	550	340	280	240	204	38	8-Φ34	265	131
200	650	405	345	300	260	44	12-Φ34	310	235