




SUYAN VALVE

Noise elimination check valves

消声止回阀

HC41X-16

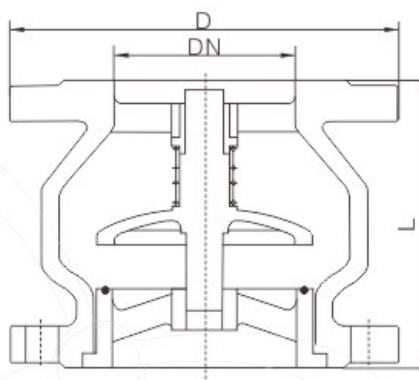

性能规范 Technical data

公称通径Nominal Diameter(DN)	50-200	
公称压力 PN(MPa) Nominal pressure	16	10
动作压力 Action Pressure	≈0.12MPa	
适用介质 Suitable medium	水 Water	
适用温度℃ Suitable temperature	≈100	

主要零部件材料 Material of Main Parts

名称 Name	阀体 Valve body	阀板 Valve board	阀杆 Valve pole	导向支架 Guiding holder	缓冲环 Slow a ring down
材料 Matenal	铸铁 Casting	铸铁嵌 Casting Rubberis enclosed	铸青铜 Bronze	铸铁、铜环 Castlron, copper are encirled by	铸铁、铜环 Castlron, copper are encirled by

一可根据用户需求生产铸青铜，不锈钢阀体的止回阀。
 One may produce Zhu bronze according to consumer need, stainless valve body non-return valve.

外形尺寸及重量 Overal& Connection Dimensions & wiegh

公称压力 PN(MPa) Nominal pressure	公称通径 DN(mm) Nominal diameter	尺寸 Size(mm)				
		L	D	K	b	Z-Φd
1.0	40	124	145	110	18	4-Φ18
	50	125	165	125	20	4-Φ18
	65	134	185	145	20	4-Φ18
	80	153	200	160	22	8-Φ18
	100	161	220	180	24	8-Φ18
	125	188	250	210	26	8-Φ18
	150	220	285	240	26	8-Φ18
	200	252	340	295	28	8-Φ18
	250	270	395	350	28	12-Φ22
	300	286	445	400	28	12-Φ22
	350	380	505	460	30	16-Φ26
	400	405	565	515	32	16-Φ26
450	430	615	565	32	20-Φ26	
500	450	670	620	34	20-Φ26	
600	510	780	725	36	20-Φ26	

公称压力 PN(MPa) Nominal pressure	公称通径 DN(mm) Nominal diameter	尺寸 Size(mm)				
		L	D	K	b	Z-Φd
1.6	40	124	145	110	18	4-Φ18
	50	125	165	125	20	4-Φ18
	65	134	185	145	20	4-Φ18
	80	153	200	160	22	8-Φ18
	100	161	220	180	24	8-Φ18
	125	188	250	210	26	8-Φ18
	150	220	285	240	26	8-Φ18
	200	252	340	295	30	12-Φ22
	250	270	405	355	32	12-Φ26
	300	286	460	410	32	12-Φ26
	350	380	520	470	36	16-Φ26
	400	405	580	525	38	16-Φ30
450	430	640	585	40	20-Φ30	
500	450	710	650	42	20-Φ33	
600	510	840	770	48	20-Φ36	